
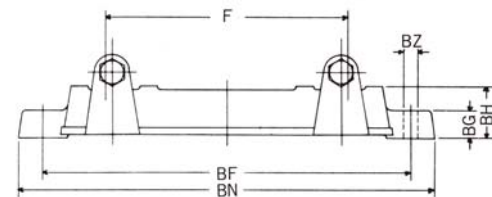


KS型スライドベース (調整ボルト4本型) (KS132M~KS250M)

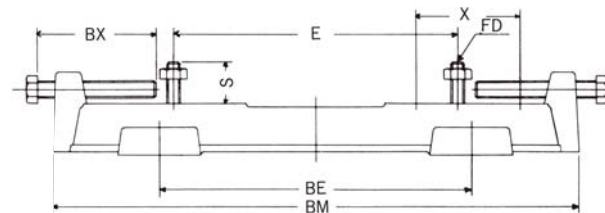

枠番	防滴形					全閉形				モーターベース寸法表												概要重量	
	2P	4P	6P	8P		2P	4P	6P	8P	F	E	BF	BE	BN	BM	BH	BG	BZ	FD	S	BX		X
KS132M		7.5	5.5	3.7			7.5	5.5	3.7	178	216	280	220	318	372	45	25	13	10	34	12×130	60	6.5 ^{kg}
KS160M	11 15	11 15	7.5	5.5		11 15	11	7.5	5.5	210	254	330	250	372	440	50	26	16	12	37	14×140	70	9.0
KS160L	18.5 22	15 18.5	11	7.5		18.5	15	11	7.5	254	254	370	250	412	440	50	26	16	12	37	14×140	70	9.5
KS180M	22 30	22 30	15 18.5	11 15		22	18.5 22	15	11	241	279	370	280	416	504	55	28	16	12	43	16×160	80	13.5
KS180L	37 45	37 45	22 30	15 22		30	30	18.5 22	15	279	279	410	280	456	504	55	28	16	12	43	16×160	80	14.0
KS200M	55	55	37 45	22 30		—	—	—	—	267	318	420	320	470	575	60	30	18	16	49	16×160	100	IE1のみ 19.5
KS200L	—	—	—	—		37 45	37 45	30 37	18.5 22	305	318	460	320	510	580	60	30	18	16	49	16×160	100	23.0
KS225S	75	75	55	37		55	55	45	30	286	356	435	360	485	614	60	30	18	16	52	20×160	120	28.0
KS225M	90	90	75	45		—	—	—	—	311	356	460	360	516	610	60	30	18	16	52	20×160	120	IE1のみ 25.5
KS250S	110	110	90	55		75	75	55	37	311	406	480	406	540	716	70	32	24	20	60	20×210	150	36.0
KS250M	132	132	110	75		90	90	75	45	349	406	520	406	580	716	70	32	24	20	60	20×210	150	36.0